


步进驱动器系列

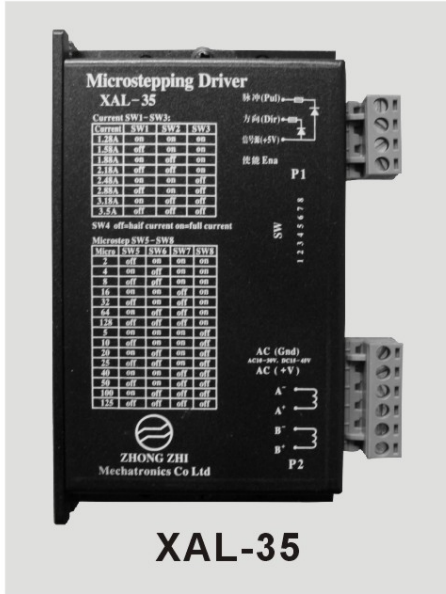

XAL-35

特点

- ★ 直流供电、电压范围 (DC15V-DC40V / AC10V-AC29V)
- ★ 典型电压: DC24V-DC40V
- ★ 相电流: (1.28A-3.5A)
- ★ 精度可选: 2、4、8、16、32、64、128、5、10、20、25、40、50、100、125
- ★ 输入信号TTL兼容
- ★ 匹配电机: 35、39、42、57、86(4线、6线、8线电机)
- ★ 静止时, 线圈电流自动减半
- ★ 双极性恒流斩波
- ★ 外型尺寸: 132×76×38 (mm)

典型应用

适合各种中小型自动化设备和仪器, 例如刻字机、绘图仪、打标机、小型雕刻机、拿放装置等自动化设备。


细分精度设定表

细分数	2	4	8	16	32	64	128	5	10	20	25	40	50	100	125
SW5	off	on	off	on	off	on	off	on	off	on	off	on	off	on	off
SW6	on	off	off	on	on	off	off	on	on	off	off	on	on	off	off
SW7	on	on	on	off	off	off	off	on	on	on	on	off	off	off	off
SW8	on	on	on	on	on	on	on	off	off	off	off	off	off	off	off

电流设定表

Current	SW1	SW2	SW3
1.28A	on	on	on
1.58A	off	on	on
1.88A	on	off	on
2.18A	off	off	on
2.48A	on	on	off
2.88A	off	on	off
3.18A	on	off	off
3.5A	off	off	off

安装图纸 (正面、侧面)

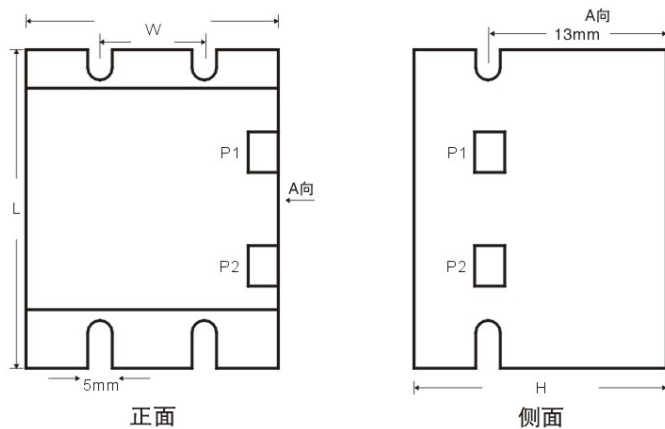

L=132mm W=76mm H=38mm